

Radio Technology Somfy® RTS > LT60 Altus RTS

LT60 Altus RTS

660R2 1162213
 680R2 1164132
 6100R2 1166142




Radio Technology Somfy® (RTS) allows for wireless radio control of motorized window coverings, awnings and rolling shutters via the RTS family of controls.



Technical features

Voltage Supply	120V AC 60Hz	Temperature Working Range	14°F to 104°F (-10°C to 40°C)
Index Protection Rating	IP 44	Insulation Class	Class 1 for 120V
Limit Switch Type	Electronic RTS	Antenna	Integrated into power cord. Must be at least 12 inches and must not come in contact with metal.
Limit Switch Capacity	200 Turns		

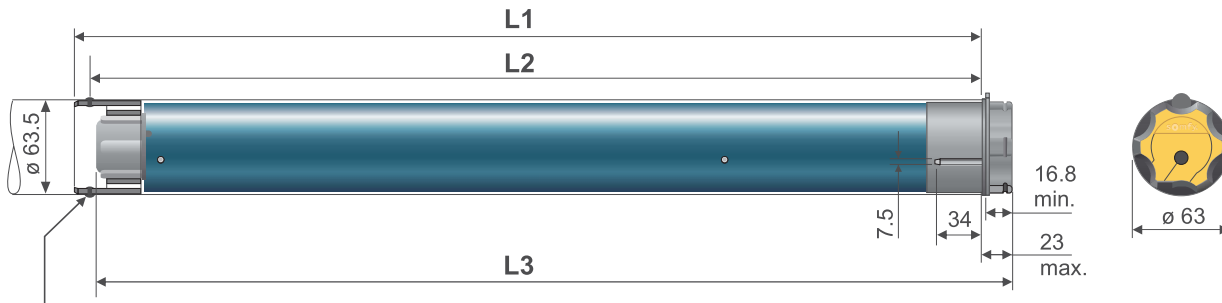

4 x Ø 5 mm - 12 mm long steel pop rivet or screw, 90° apart.

Performances

	660R2	680R2	6100R2
Torque (in. lbs.)	60 Nm (530 in. lbs.)	80 Nm (700 in. lbs.)	100 Nm (880 in. lbs.)
Nominal Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Rated Current	2.5A	3.4A	3.8A
Speed	14 rpm	14 rpm	14 rpm
Thermal Protection	4 minutes	4 minutes	4 minutes
Radio Frequency	433.42 MHz	433.42 MHz	433.42 MHz
Sound Level	≤ 63 dBA	≤ 65 dBA	≤ 67 dBA

Dimensions

	660R2	680R2	6100R2
L1	27.32 in (694 mm)	28.89 in (734 mm)	28.89 in (734 mm)
L2	26.65 in (677 mm)	28.23 in (717 mm)	28.23 in (717 mm)
L3	27.56 in (700 mm)	29.13 in (740 mm)	29.13 in (740 mm)
Cable Length	6.5 ft (2 m)	6.5 ft (2 m)	6.5 ft (2 m)

Optional cables with NEMA plugs available in 3 ft, 6 ft, 12 ft, 18 ft, 24 ft.

Type of cable

RTS
 120V / 60Hz
 3 conductor cable

