

LT60 Standard

660R2 1162036
680R2 1164034
6100R2 1166038




Offers control via power switching.



Technical features

Voltage Supply	120V AC 60Hz
Index Protection Rating	IP 44
Limit Switch Type	Rapid Adjustment RA
Limit Switch Capacity	35 Turns

Temperature Working Range	14°F to 104°F (-10°C to 40°C)
Insulation Class	Class 1 for 120V
Wiring	Do not wire two or more LT motors in parallel.

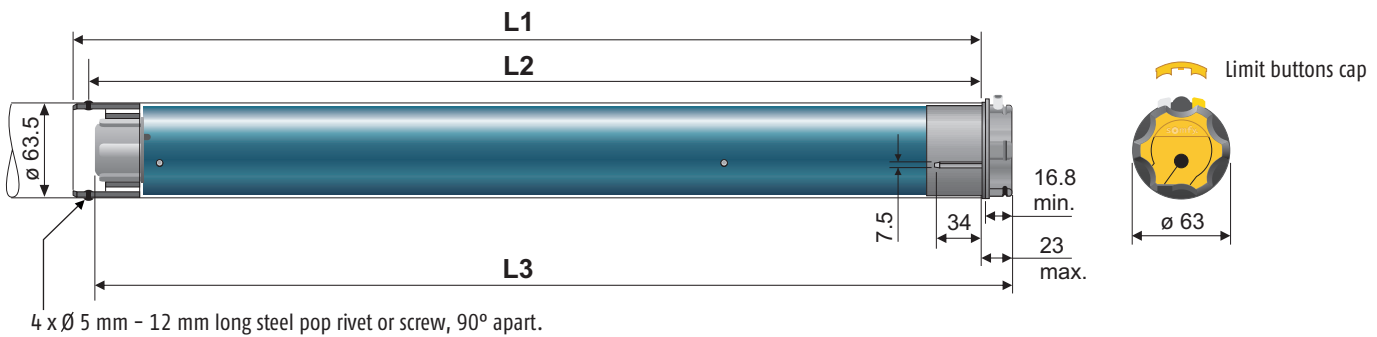

Performances

	660R2	680R2	6100R2
Torque (in. lbs.)	60 Nm (530 in. lbs.)	80 Nm (700 in. lbs.)	100 Nm (880 in. lbs.)
Nominal Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Rated Current	2.5A	3.4A	3.8A
Speed	14 rpm	14 rpm	14 rpm
Thermal Protection	5 minutes	5 minutes	5 minutes
Sound Level	≤ 63 dBA	≤ 65 dBA	≤ 67 dBA

Dimensions

	660R2	680R2	6100R2
L1	25.94 in (659 mm)	25.94 in (659 mm)	25.94 in (659 mm)
L2	25.27 in (642 mm)	25.27 in (642 mm)	25.27 in (642 mm)
L3	26.18 in (665 mm)	26.18 in (665 mm)	26.18 in (665 mm)
Cable Length	6.5 ft (2 m)	6.5 ft (2 m)	6.5 ft (2 m)

Optional cables available in 6 ft, 12 ft and 24 ft.

Type of cable

Wired
120V / 60Hz
4 conductor cable

